

cnPilot™ e410, e600 Indoor Wi-Fi Access Points

802.11ac Wave 2

QUICK LOOK:

Designed to scale from small enterprises to K12 schools, the e410 and e600 feature an easy-to-install integrated bracket and is enterprise grade 802.11ac Wave 2.

e410 and e600 share a common industrial design for repeatable and predictable installation in any enterprise or business. Both access points (AP) can be managed by cnMaestro cloud, on-premises cnMaestro, a private datacenter or as a standalone AP.



	e410	e600
802.11 a/b/g/n/ac Wave 2	✓	✓
5 GHz / 2.4 GHz streams	2x2 / 2x2	4x4 / 2x2
Gigabit Ethernet	1	2



CLOUD-MANAGED ACCESS

cnMaestro™ provides end-to-end cloud Dashboard for Wi-Fi, Ethernet, and fixed wireless broadband:

- Zero-touch onboarding
- Inventory tracking & monitoring
- Mass configuration & upgrade
- Dashboard views with alarms
- Troubleshooting
- Hierarchical device organization

cnMaestro Essential cloud management is included at no additional cost. No setup fee, no license, and no recurring cost.

CONTROLLER-LESS ROAMING, POWERFUL SIMPLICITY

cnPilot e410 and e600 include controller-less distributed intelligence for seamless roaming and enhanced roaming for up to 1,000 devices. cnMaestro management provides end-to-end visibility and zero-touch provisioning across thousands of sites.

MONETIZE: VOUCHERS. SOCIAL LOGIN

A hotspot portal can be designed in the cloud and distributed to each site's access point with a single touch. Wi-Fi hotspot capabilities support splash page hosting, social login, temporary access vouchers, and multiple credit card payment gateways. Control time, rate and data volume traffic profiles.

HIGH CAPACITY AND RELIABILITY

Airtime fairness, standardized beamsteering, and MU-MIMO increase network capacity while automatic RF management monitors performance and optimizes the network to avoid interference. Detailed network statistics, utilization graphs, and integrated troubleshooting ensure service is always on.


cnPilot™ e410 and e600 Indoor Wi-Fi Access Points

Access Point Specifications			
	e410 (Hardware specs subject to change)		e600
US-FCC	CH 1–11, 36–64, 100–144, 149–165		CH 1–11, 36–64, 100–144, 149–165
ISED Canada	CH 1–11, 36–64, 100–116, 149–165		CH 1–11, 36–64, 100–116, 149–165
EU-ETSI	CH 1–13, 36–64, 100–140		CH 1–13, 36–64, 100–140
ROW	CH 1–13, 36–64, 100–144, 149–165 2400–2483.5 MHz, 5150–5850 MHz <i>Individual country limitations apply</i>		CH 1–13, 36–64, 100–144, 149–165 2400–2483.5 MHz, 5150–5850 MHz <i>Individual country limitations apply</i>
DFS	Channels to be released later		
Radios	1 x 5 GHz radio (802.11 a/n/ac Wave 2), 2x2 1 x 2.4 GHz (802.11 b/g/n), 2X2 SU-MIMO / MU-MIMO: 2 streams		1 x 5 GHz radio (802.11 a/n/ac Wave 2), 4x4 1 x 2.4 GHz (802.11 b/g/n), 2x2 SU-MIMO / MU-MIMO: 4 streams
Wi-Fi	802.11 a/b/g/n/ac		802.11 a/b/g/n/ac
SSID Security	WPA2 (802.11i), WPA2 Enterprise (802.1x/EAP), WPA PSK, Open		
Max PHY Rate	2.4 GHz: 400 Mbps	5 GHz: 867 Mbps	2.4 GHz: 400 Mbps 5 GHz: 1733 Mbps
Ethernet	One IEEE Gigabit Ethernet auto sensing		Two IEEE Gigabit Ethernet auto sensing
USB Ports	–		1 USB 2.0 port
Antenna	Internal omni-directional 2.4 GHz: 5.24 dBi 5 GHz: 5.47 dBi		Internal omni-directional 2.4 GHz: 5.28 dBi 5 GHz: 6.11 dBi
Max EIRP	2.4 GHz: 29.50 dBm 5 GHz: 30 dBm (EIRP limited by country regulations)		2.4 GHz: 29.28 dBm 5 GHz: 34.11 dBm (EIRP limited by country regulations)
WLAN	256 clients, 32 SSIDs (16 per radio) WPA-TKIP, WPA2 AES, 802.1x, 802.11w PMF		512 clients, 32 SSIDs (16 per radio) WPA-TKIP, WPA2 AES, 802.1x, 802.11w PMF
Power	802.3af powered device Typical load: 9 W, Max: 11.5 W		802.3af or 802.3at powered device Typical load: 12 W, Max: 22 W 2.1 mm 12 VDC barrel connector
Mounting	Desktop, Wall, ceiling tile mount - included T-bar mount 14 mm x 24 mm x 38 mm (0.55 in x 0.94 in x 1.5 in) Ceiling Tile mount included Kensington lock slot		Desktop, Wall, ceiling tile mount - included T-bar mount 14 mm x 24 mm x 38 mm (0.55 in x 0.94 in x 1.5 in) Ceiling Tile mount included Kensington lock slot
Dimensions	180 mm x 180 mm x 42mm (7.09 in x 7.09 in x 1.65 in)		180 mm x 180 mm x 42mm (7.09 in x 7.09 in x 1.65 in)
Weight	384 g (0.85 lb)		400 g (0.88 lb)
LEDs	Single Tri-color LED (amber, blue, green)		Single Tri-color LED (amber, blue, green)
Ambient Operation Temperature	0°C to 50°C (32°F to 122°F)		0°C to 50°C (32°F to 122°F)
Storage Temperature	-40°C to 70°C (-40°C to 158°F)		-40°C to 70°C (-40°C to 158°F)
Humidity	95% RH non-condensing		95% RH non-condensing
MTBF	1.5m hours		1m hours
Certifications	Wi-Fi Alliance 802.11 a/b/g/n/ac, Passpoint 2.0 FCC, ETSI, CE, EN 60601-1-2, IEC62368 UL2043		Wi-Fi Alliance 802.11 a/b/g/n/ac, Passpoint 2.0 FCC, ETSI, CE, EN 60601-1-2, IEC62368 UL2043

cnPilot™ e410 and e600 Indoor Wi-Fi Access Points

Management

Adaptive cnPilot Network

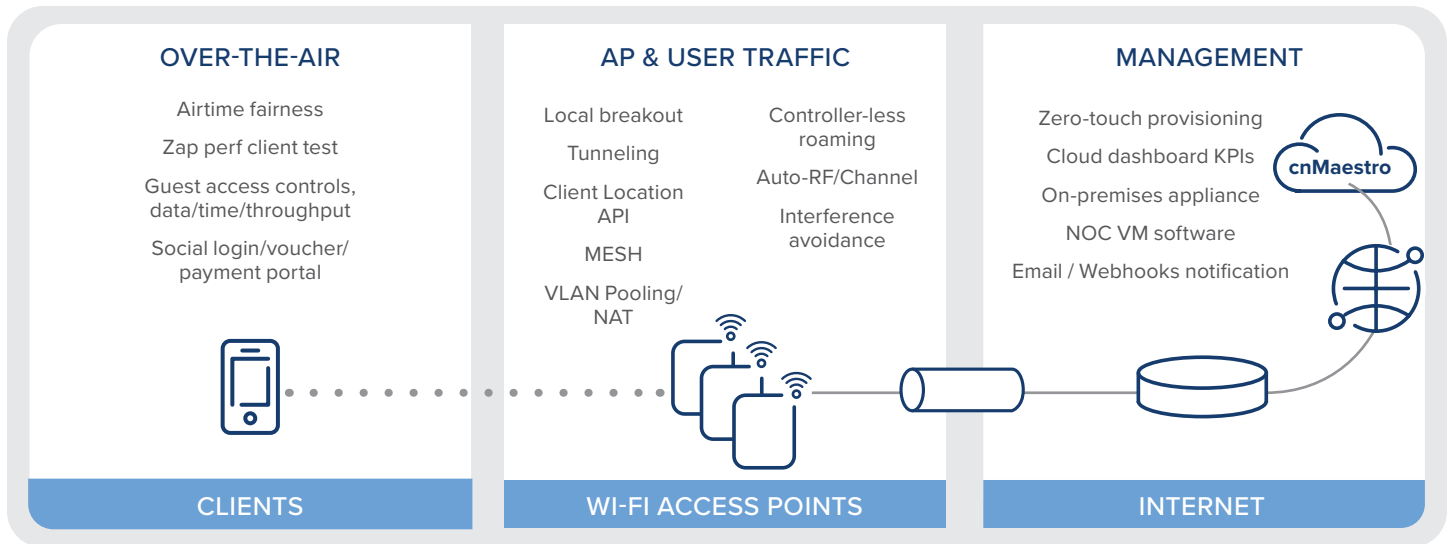

Cambium cnMaestro uses a distributed intelligence architecture with a cloud-first cnMaestro management and edge-intelligent access points that self-optimize for the RF environment. cnMaestro and cnPilot access points provide automatic RF management and seamless roaming, with a cloud-first, multi-site management for up to 10,000 devices and hundreds of thousands of connected clients. cnMaestro delivers single pane-of-glass management for Cambium broadband fixed wireless, cnMatrix Ethernet switches, enterprise-grade Wi-Fi access points and service provider residential routers.

Interfaces HTTP / HTTPS web interface, SSH, Telnet
SNMP V1, V2, V3
Syslog, SNMP traps, NTP

Deployment cnMaestro Cloud, cnMaestro on-premises,
Standalone AP

Services Monetized guest portal with design tools

Captive Portal

Portal features hosted on cnMaestro:

Design templates, customization tools
supports 3rd party external portal
RADIUS/LDAP/Click Through authentication
Active Directory, Google, Facebook, Office 365,
OAuth 2.0
Data Rate/Throughput limits, Time duration

Portal features hosted on the AP:

supports 3rd party external portal
RADIUS/LDAP/Click Through authentication
Data Rate/Throughput limits, Time duration

Hotspot 2.0 Hotspot 2.0/Passpoint 2.0

Accounting RADIUS accounting, load balancing AAA servers,
Dynamic Authorization COA, DM

Service Availability Critical network resource monitor with SSID
shutdown

cnPilot™ e410 and e600 Indoor Wi-Fi Access Points

WLAN And Network Specifications

Authentication Encryption 802.1x EAP-SIM/AKA/AKA'/FAST, EAP-PEAP, EAP-TTLS, EAP-TLS/MSCHAPv2, PEAPv0/PEAPv1
 MAC authentication to local database (on AP, on Controller) or external RADIUS.
 MAC auth fallback to guest portal

Scheduled WLAN On/off by day, week, time of day

QoS 802.11e/WMM QoS. DSCP/ToS mapping

VLAN 802.11Q, max 4096

Fast Roaming 802.11r, OKC, cnMaestro assisted roam

Sticky Client Enhanced roaming with thresholds

Mesh Multi-hop (2), either band

Channel Selection Auto RF: manual or automatic

APIs RESTful management and statistics API
 Presence location API
 Splunk WebSocket integration, WebSocket
 DNS, NAT, TCP connection log

Network NAT, NAT logging firewall, DOS protection, L2/L3/DNS ACL, DHCP server, DHCP Relay option 82
 LLDP, IGMP v1, v2
 VLAN Pooling, RADIUS attribute VID
 VLAN per SSID, per user
 Wireless Intrusion Detection

Band Steer Load Balance Yes

Tunnel L2TPv2, L2GRE, PPPoE

Network and RF Management Tools Out-of-band RF spectrum analysis, RF monitor with channel/noise/interference, wired and wireless remote packet capture, ZapD performance tool, rogue AP detection

Standards


Wi-Fi Protocols VHT MCS rates, 16-QAM, 64-QAM, 256-QAM, HT20/40/80 MHz

Transmit beamsteering, Airtime Fairness, Packet Aggregation (AMSDU, AMPDU) RIFS, STBC, LDPC, 802.11k, 802.11v


MIMO Power Save, MRC, BPSK, QPSK, CCK, DSSS, OFDM. IEEE 802.11d/e/h/i/k/r/u/v

cnPilot™ e410 and e600 Indoor Wi-Fi Access Points


Antenna Patterns - e410

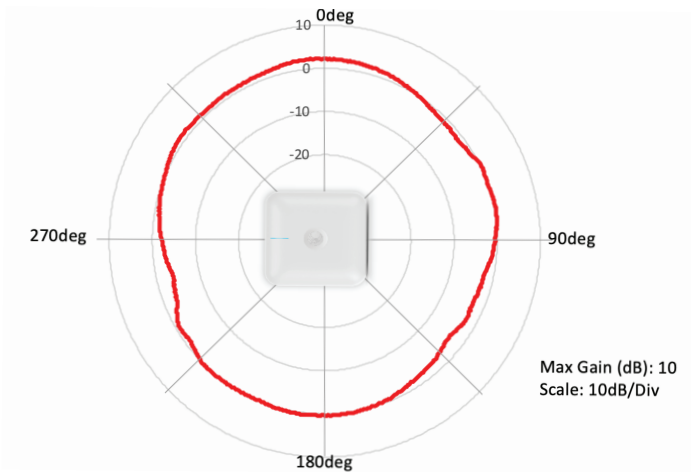


2.4 GHz Azimuth

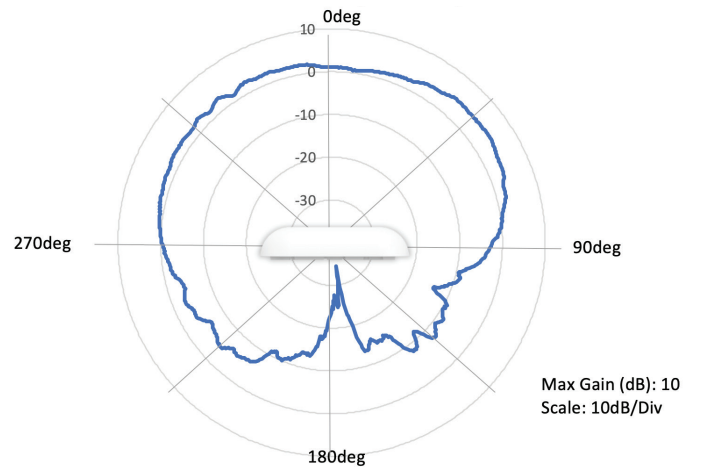

2.4 GHz Elevation

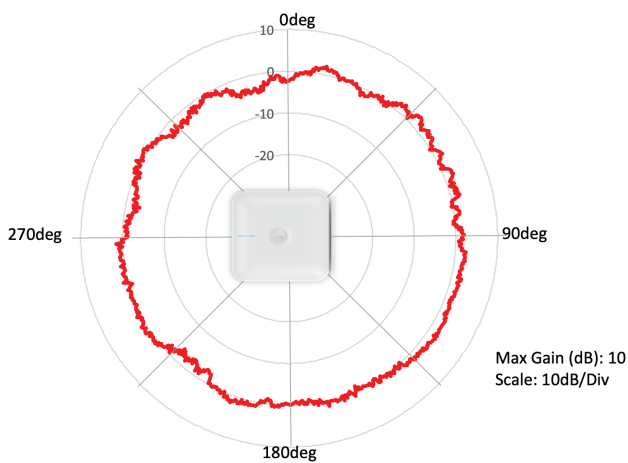


5 GHz Azimuth

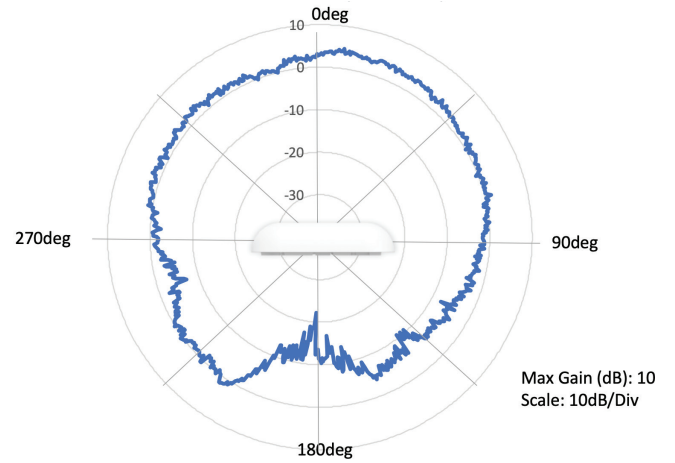


5 GHz Elevation

cnPilot™ e410 and e600 Indoor Wi-Fi Access Points


Antenna Patterns - e600

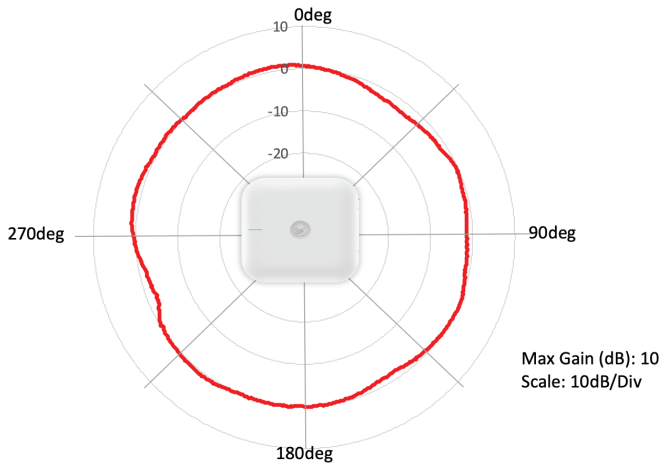


2.4 GHz Azimuth

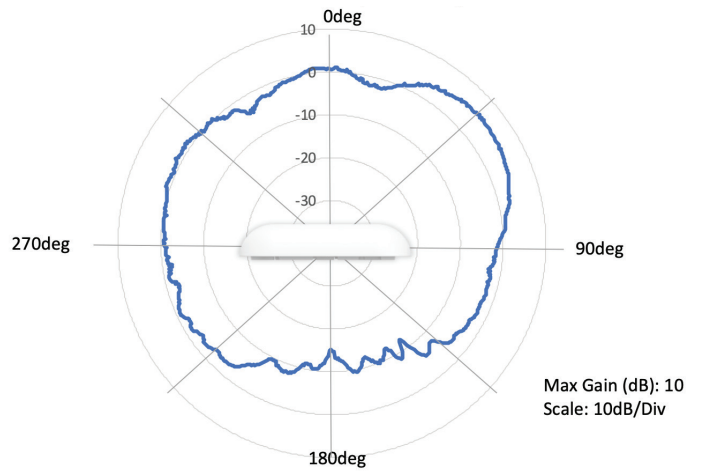

2.4 GHz Elevation

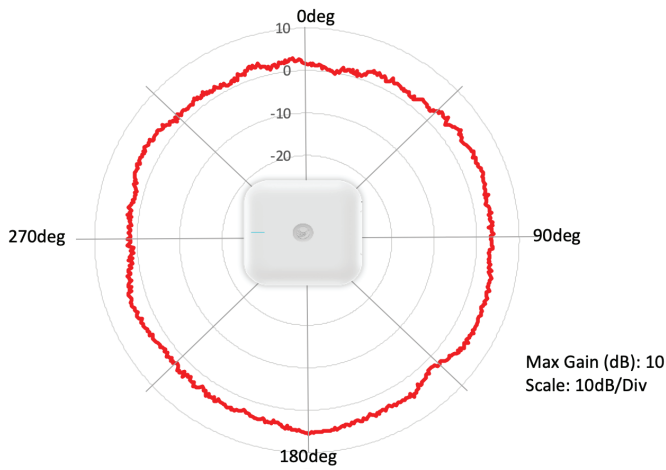

5 GHz Azimuth

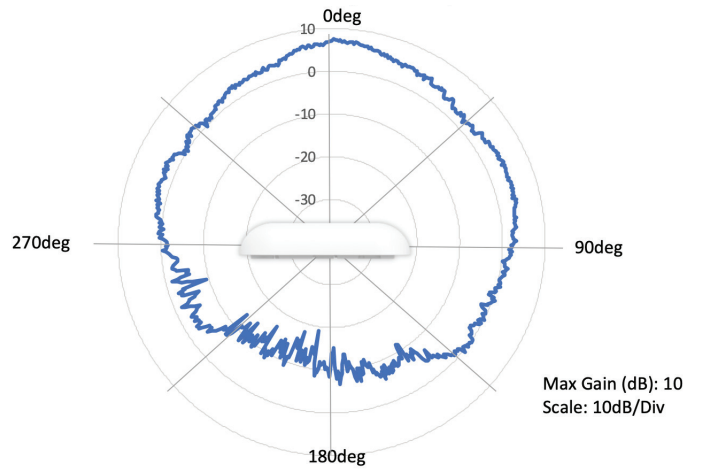

5 GHz Elevation

cnPilot™ e410 and e600 Indoor Wi-Fi Access Points


e410

e600

e410 Ordering Information

PL-E410X00B-US cnPilot e410 Indoor (FCC) 802.11ac Wave 2, 2x2, AP

PL-E410X00B-EU cnPilot e410 Indoor (EU) 802.11ac Wave 2, 2x2, AP

PL-E410X00B-RW cnPilot e410 Indoor (ROW) 802.11ac Wave 2, 2x2, AP

PL-E410X00B-CA cnPilot e410 Indoor (IC) 802.11ac Wave 2, 2x2, AP

e600 Ordering Information

PL-E600X00A-US cnPilot e600 Indoor (FCC) 802.11ac Wave 2, 4x4, AP

PL-E600X00A-EU cnPilot e600 Indoor (EU) 802.11ac Wave 2, 4x4, AP

PL-E600X00A-RW cnPilot e600 Indoor (ROW) 802.11ac Wave 2, 4x4, AP

N000000L034A Power supply, 30 W, 56 W, RJ45 – Gbps support. C5 AC port. AC line cord sold separately

Not all SKUs are available at first release. Consult your Cambium Networks distributor for country availability.

LIMITED WARRANTY

Cambium Networks cnPilot e410 and e600 are covered by a limited lifetime hardware warranty for a period of 5 years after point of sale.

ABOUT CAMBIUM NETWORKS

Cambium Networks empowers millions of people with wireless connectivity worldwide. Its wireless portfolio is used by commercial and government network operators as well as broadband service providers to connect people, places and things. With a single network architecture spanning fixed wireless and Wi-Fi, Cambium Networks enables operators to achieve maximum performance with minimal spectrum. End-to-end cloud management transforms networks into dynamic environments that evolve to meet changing needs with minimal physical human intervention. Cambium Networks empowers a growing ecosystem of partners who design and deliver gigabit wireless solutions that just work.

cambiumnetworks.com

09242021